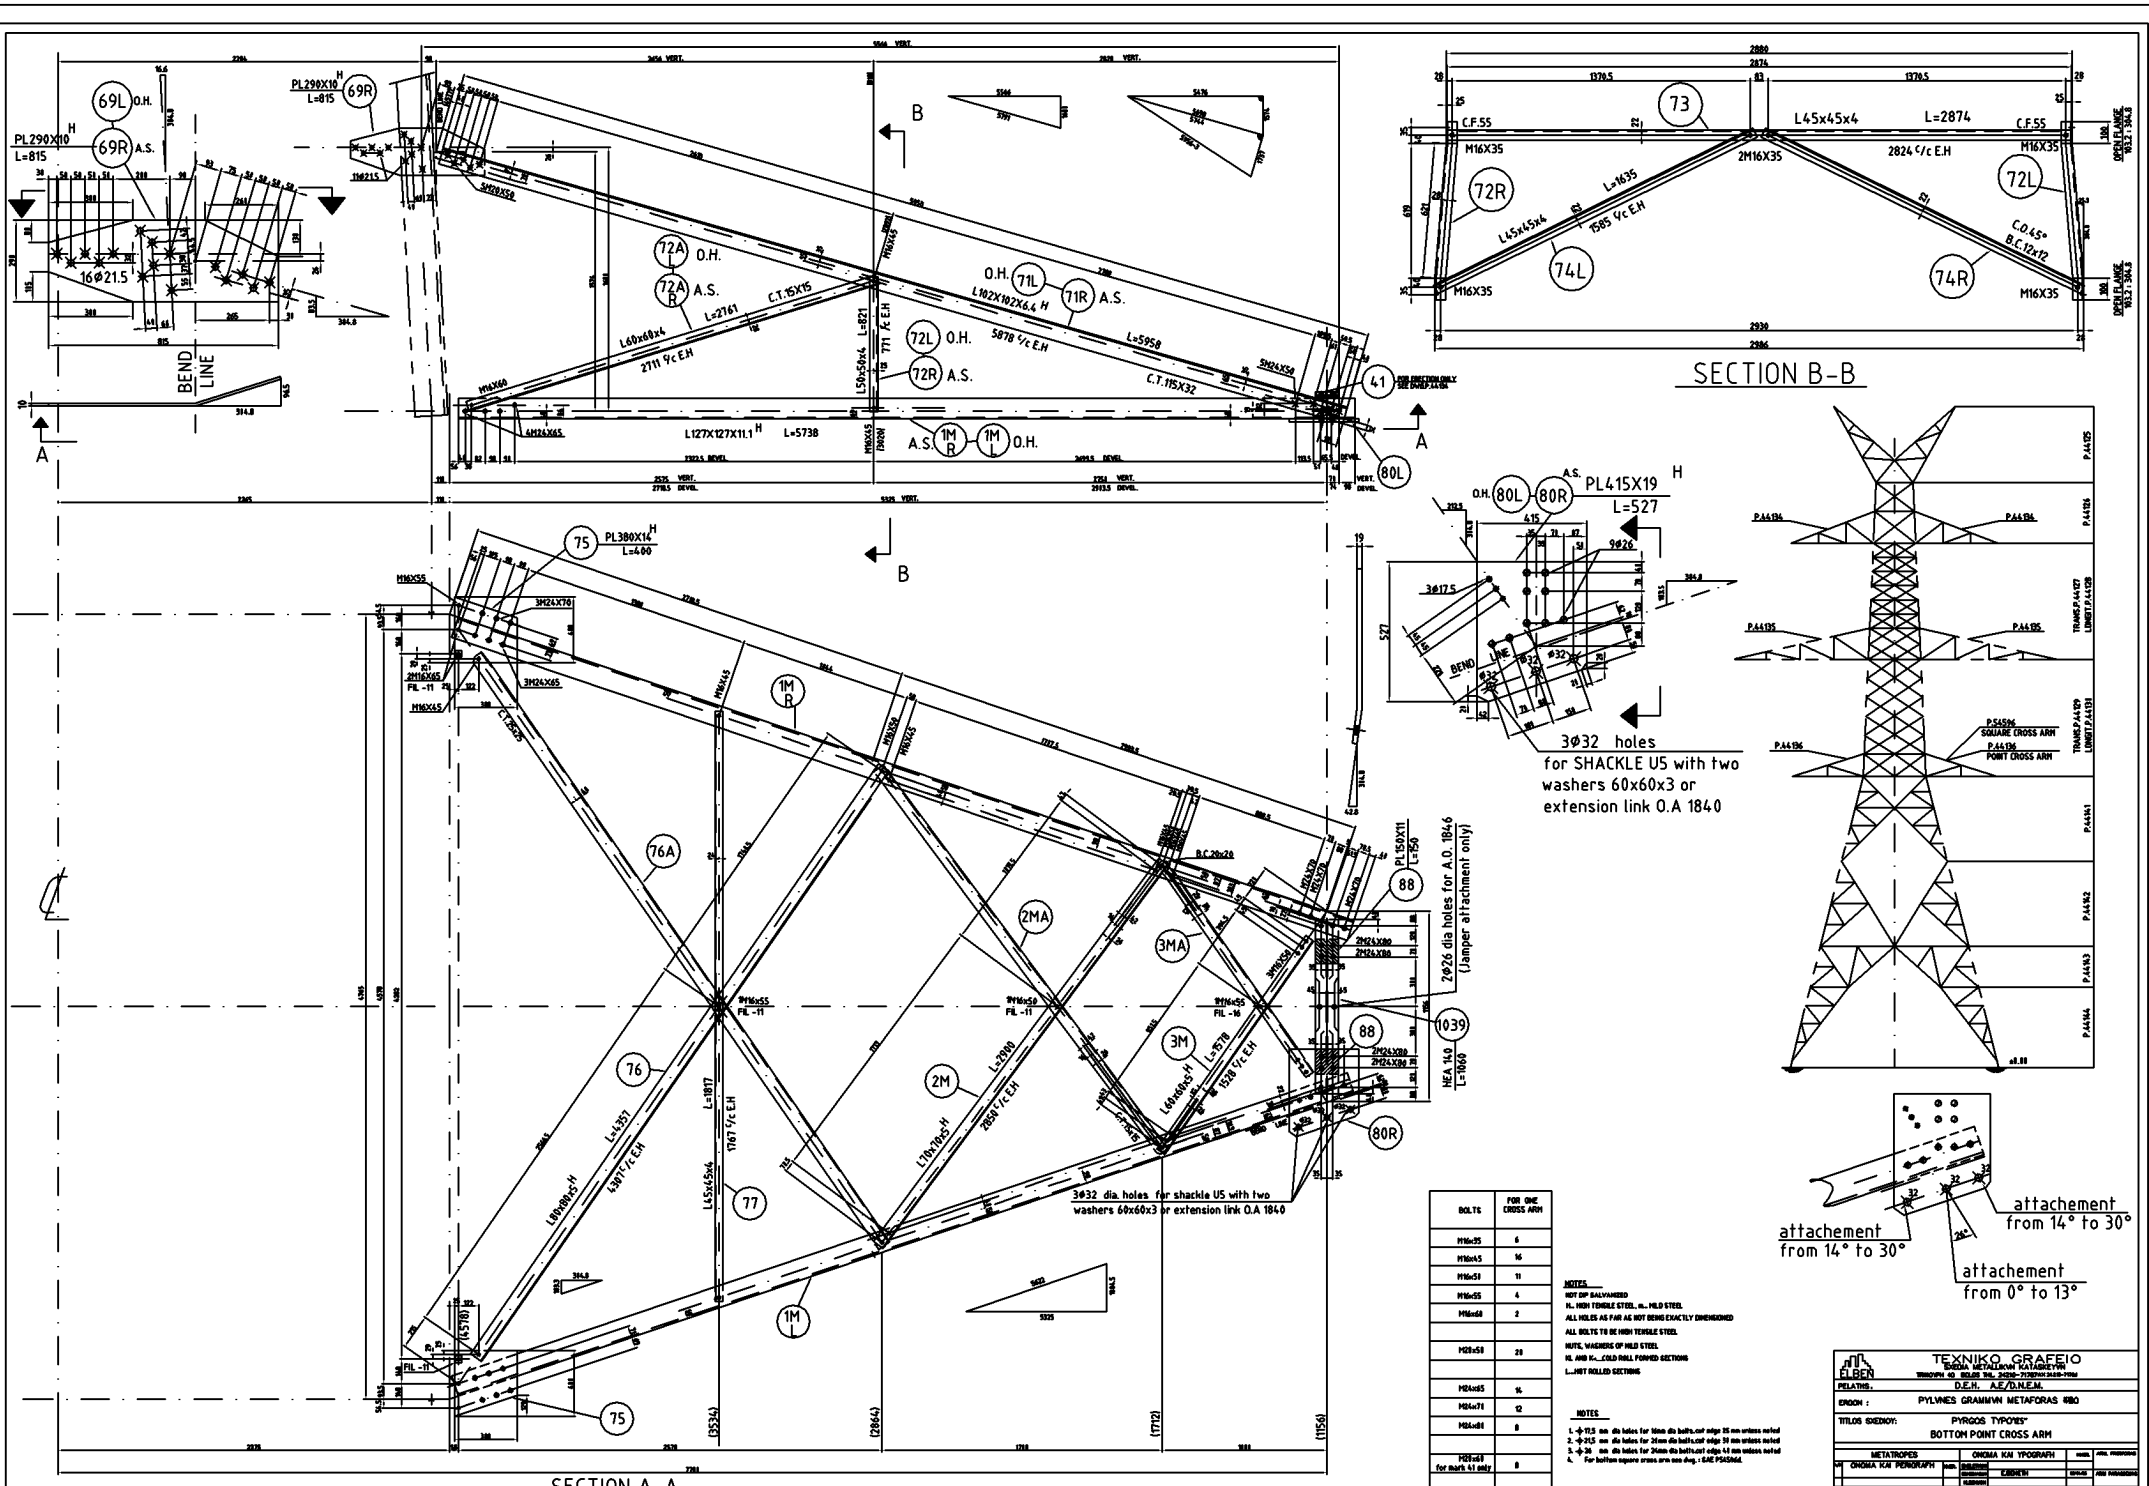
SECTION A-A
SECTION B-B
3Ø32 holes
for SHACKLE U5 with two
washers 60x60x3 or
extension link O.A 1840
3Ø32 dia. holes for shackle U5 with two
washers 60x60x3 or extension link O.A 1840
2Ø26 dia holes for A.O. 1846
(Jamper attachment only)
attachement
from 14° to 30°
attachement
from 14° to 30°
attachement
from 0° to 13°
BEND LINE
BOLTS
FOR ONE CROSS ARM
M16x35 6
M16x45 16
M16x51 11
M16x55 4
M16x60 2
M20x50 20
M24x65 16
M24x71 12
M24x81 8
M28x69 for mark 41 only 8
NOTES
HOT DIP GALVANIZED
H.. HIGH TENSILE STEEL, M.. MILD STEEL
ALL HOLES AS FAR AS NOT BEING EXACTLY DIMENSIONED
ALL BOLTS TO BE HIGH TENSILE STEEL
NUTS, WASHERS OF MILD STEEL
H. AND K.. COLD ROLL FORMED SECTIONS
L..HOT ROLLED SECTIONS
NOTES
1. ⌖17.5 mm dia holes for 16mm dia bolts,ext edge 25 mm unless noted
2. ⌖21.5 mm dia holes for 24mm dia bolts,ext edge 31 mm unless noted
3. ⌖26 mm dia holes for 24mm dia bolts,ext edge 43 mm unless noted
4. For bottom square cross arm see dwg. : EAE P5656A4
TEXNIKO GRAFEIO
ELBEN
D.E.H. AE/D.N.E.M.
PYLVNES GRAMMVN METAFORAS 150
PYRGOS TYPOY=S"
BOTTOM POINT CROSS ARM
METATROPES
ONOMA KAI YPOGRAFH
ONOMA KAI PERIGRAFH
HMEROMHNIA
EJEKINEVH
ELEGXQHKE
EGKRIQHKE
HLIKIAKOS ARIQMOS SXEDIOY
P.441361.
PYLLA