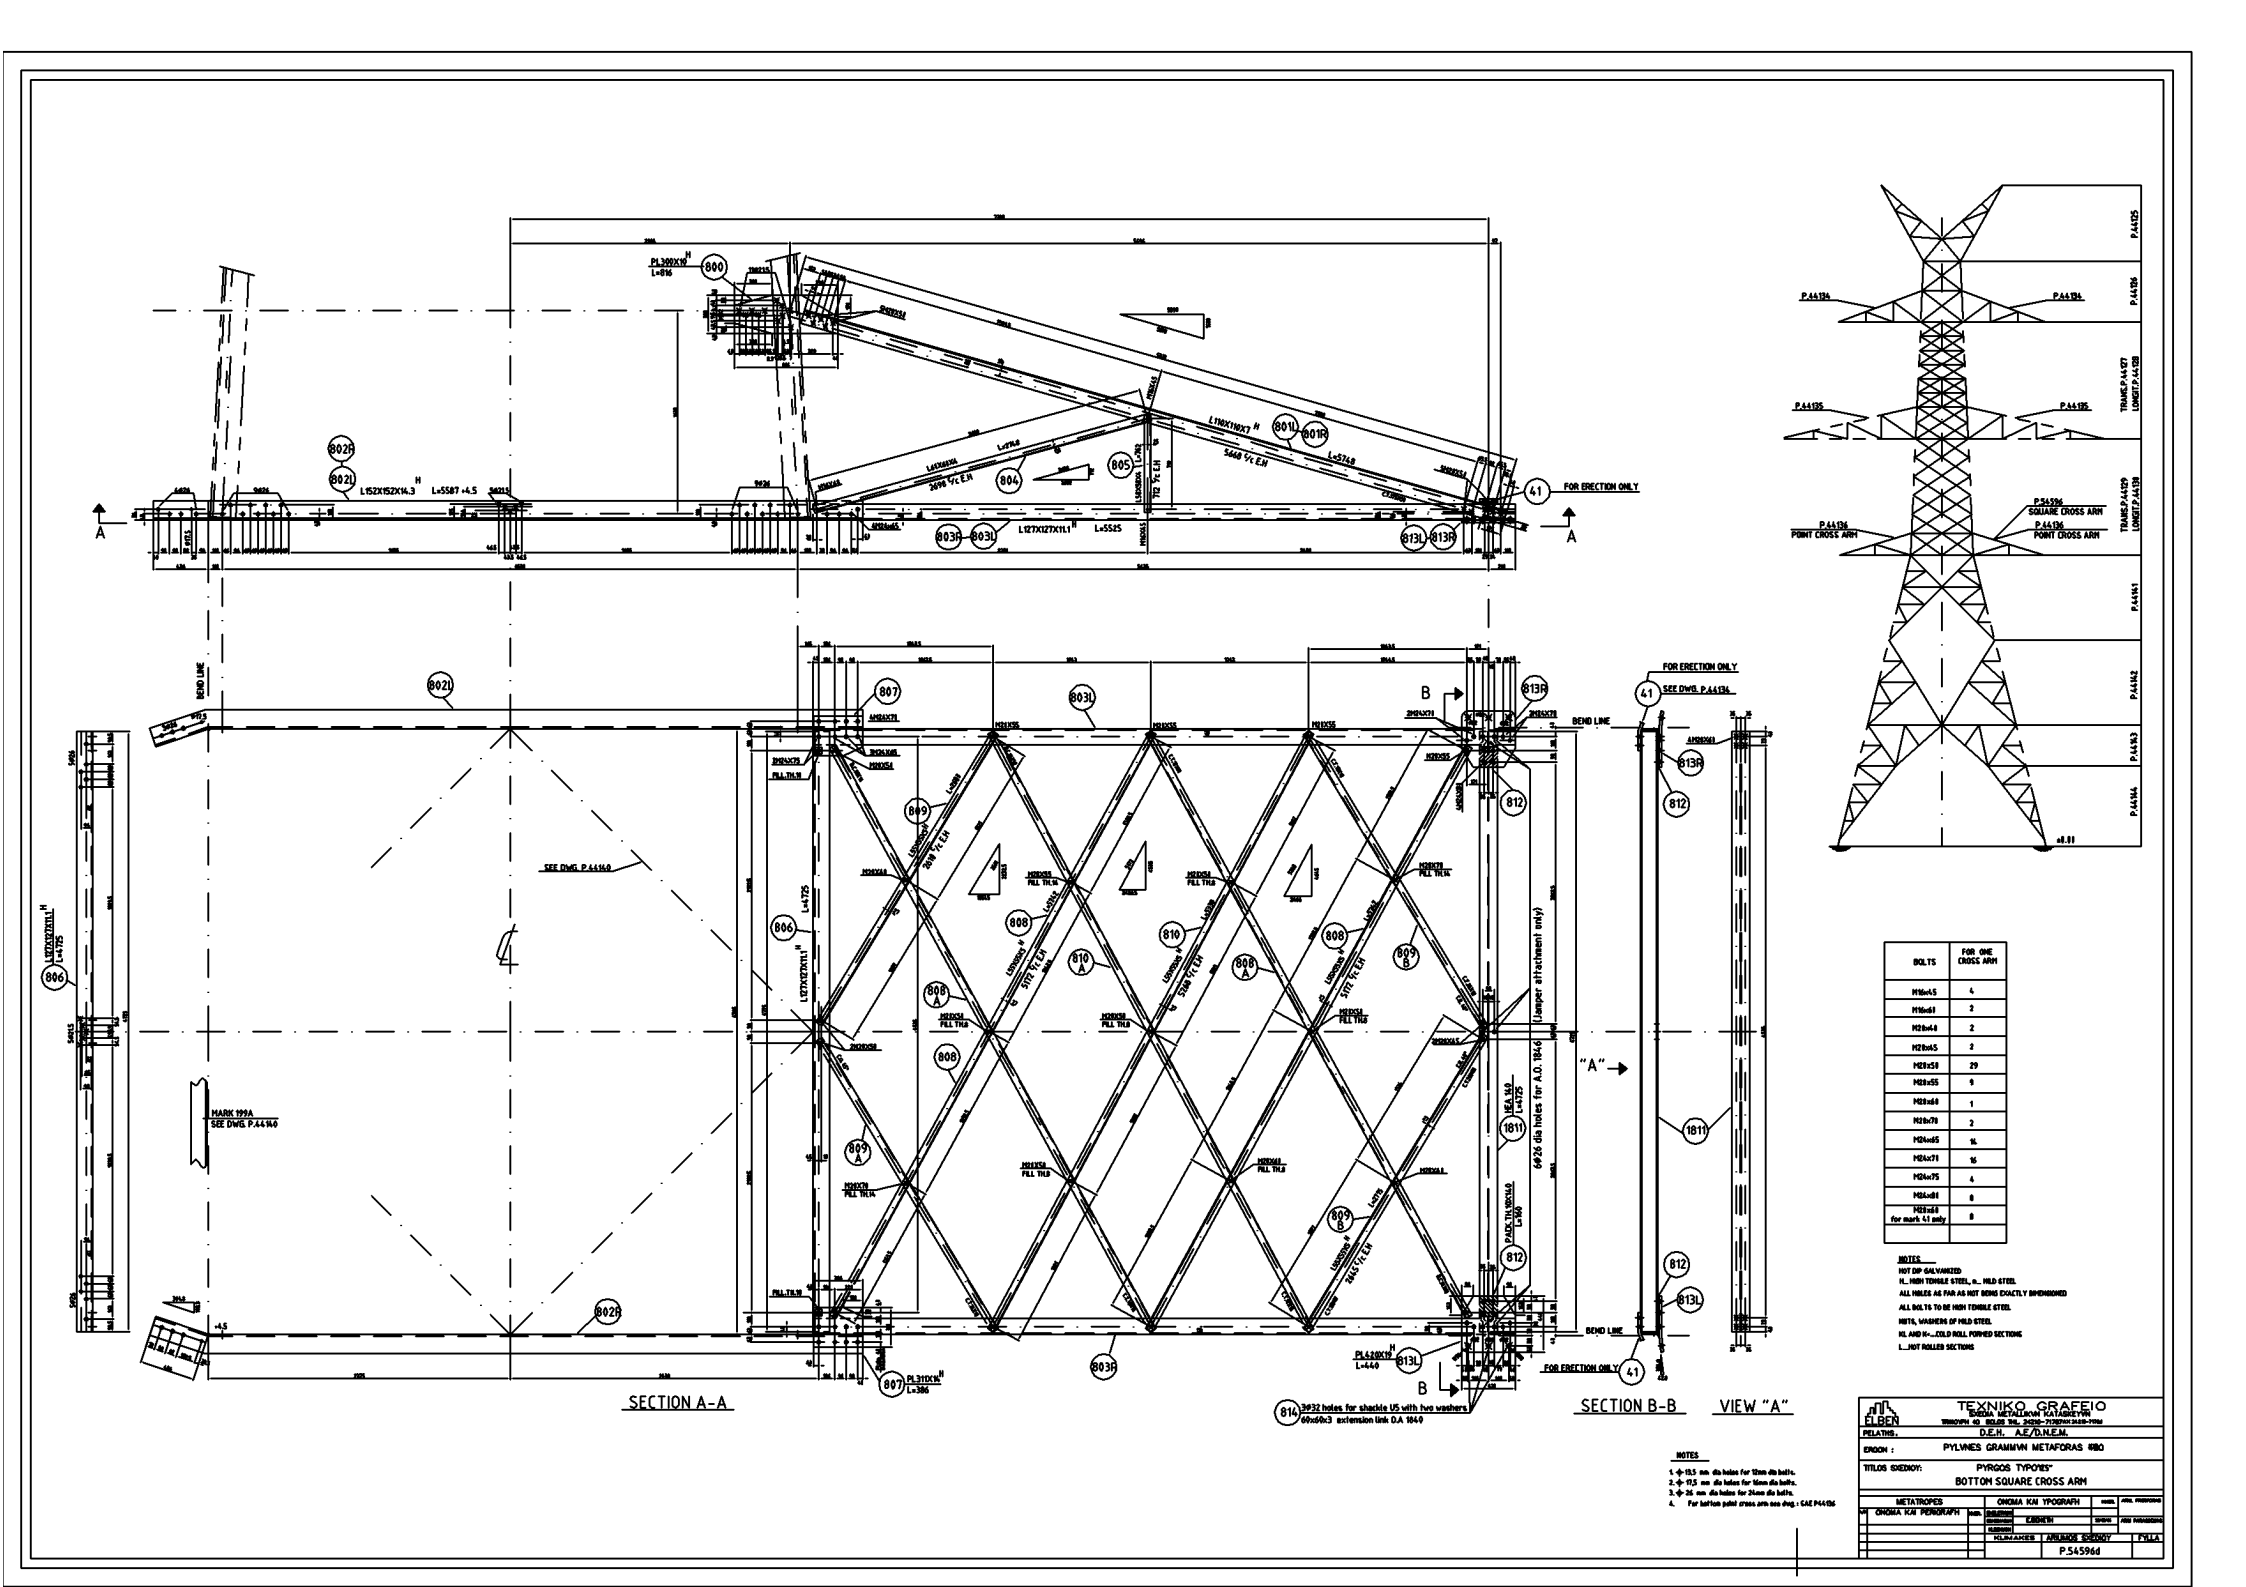

BOLTS	FOR ONE CROSS ARM
M16x45	4
M16x61	2
M20x40	2
M20x45	2
M20x50	29
M20x55	9
M20x60	1
M20x70	2
M24x65	14
M24x71	16
M24x75	4
M24x81	8
M20x60 for mark 41 only	8

NOTES
HOT DIP GALVANIZED
H... HIGH TENSILE STEEL, N... MILD STEEL
ALL HOLES AS FAR AS NOT BEING EXACTLY DIMENSIONED
ALL BOLTS TO BE HIGH TENSILE STEEL
NUTS, WASHERS OF MILD STEEL
KL AND K-...COLD ROLL FORMED SECTIONS
L...HOT ROLLED SECTIONS

NOTES
1. ⌖ 13.5 mm dia holes for 12mm dia bolts.
2. ⌖ 17.5 mm dia holes for 16mm dia bolts.
3. ⌖ 26 mm dia holes for 24mm dia bolts.
4. For bottom joint cross arm see dwg.: CAE P44136

ΕΛΒΕΝ	ΤΕΧΝΙΚΟ ΓΡΑΦΕΙΟ ΕΛΛΗΝΙΚΑ ΜΕΤΑΛΛΙΚΑ ΚΑΤΑΣΚΕΥΗ ΤΡΙΘΟΡΙΟ 40, ΒΟΛΟΣ ΤΗΛ. 24210-71700/FAX 24610-97060	
ΠΕΛΑΤΗΣ :	Δ.Ε.Η. ΑΕ/Δ.Ν.Ε.Μ.	
ΕΡΓΟΝ :	ΠΥΛΩΝΕΣ ΓΡΑΜΜΗΣ ΜΕΤΑΦΟΡΑΣ 98Ω	
ΤΙΤΛΟΣ ΣΧΕΔΙΟΥ:	ΠΥΡΓΟΣ TYPONES BOTTOM SQUARE CROSS ARM	
ΜΕΤΑΤΡΟΠΕΣ	ΟΝΟΜΑ ΚΑΙ ΥΠΟΓΡΑΦΗ	ΗΜΕΡ. ΑΠΟΔ. ΠΡΟΫΠΟΛ.
ΟΝΟΜΑ ΚΑΙ ΠΕΝΟΓΡΑΦΗ	ΣΧΕΔΙΑΣΘΗΚΕ: ΕΛΒΕΝ	ΕΓΚΡΙΘΗΚΕ: ΑΡΧ. ΜΗΧΑΝΙΚΟΣ
	ΚΛΙΜΑΚΕΣ: ΑΡΙΘΜΟΣ ΣΧΕΔΙΟΥ: P.54596d	ΦΥΛΛ.